

24VDC MOTORS CONTROL



Ideal for management of 24Vdc linear motors for pergolas



Smart and wireless electronics control for remote command




IP66 plastic box with wiring and customizable connectors

TKM 100/ONE



Control unit for 24Vdc motor with integrated switches or with amperometic control

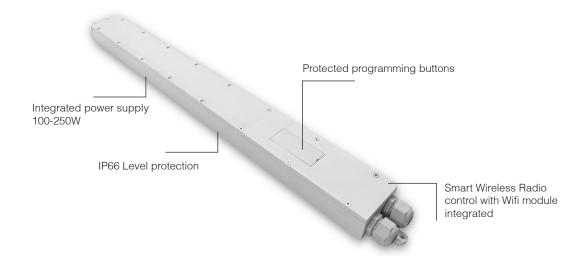



- 1. 230V power input cable L=50cm
- 2. Input for rain and wind sensors, cable L=50cm
- 3. Temperature sensor 2 ingressi pulsante, cable L=50cm
- 4. Motor output 24Vdc, cable L=50cm

Code	TKM 100/ONE	TKM 250/ONE
Power supply	230 Vac	230 Vac
Integrated power supply	100W	250W
Max power motor	100W	250W
Fuction	Open-Stop-Close / Partial opening	Open-Stop-Close / Partial opening
N. prog. transmitters	30	30
Radio Frequency	433.920 MHz ISM (868 on request)	433.920 MHz ISM (868 on request)
Wireless Smart	WiFi 2,4GHz	WiFi 2,4GHz
Remote Smart control	App OneSmart	App OneSmart
Voice control	Google home, Alexa Amazon	Google home, Alexa Amazon
IP Level protection	IP66	IP66
Working temperature	-20 +55 °C	-20 +55 °C
Dimensions	54x26x600 mm	54x26x600 mm

Remote controls



Smart control





Weather sensors





MT-R Rain sensor

ind sensor