Led driver control Interface for 0-1/10V drivers



Š

Radio RF

Wir

TOP-DL20

Command interface for driver control with DALI input (Max 20 devices, broadcast command). 230Vac power supply. Radio receiver 433.92MHz. One wired input.



Code	TOP-DL20
Power supply	110-240 Vac
Output	Broadcast
	DALI signal
Function	Dimmer
Programmable parameters	Timer On, Last intensity value
	memory
Max DALI drivers	20
Input	1 NO Push button
No. Programmable transmitters	30
Radio frequency	433.920 MHz ISM
Protection rating	IP20
Working temperature	-20 +55 °C
Dimensions	174x46x35 mm

On-Off


Dimme

DALI

Output

230 V

input

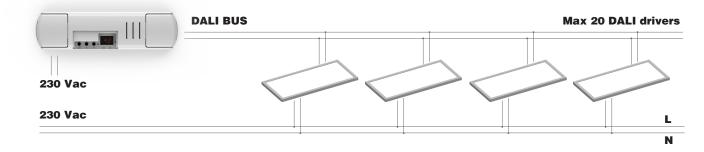

TOP LINEA

